



**RED SEAL
MEASUREMENT**

TS-614(I)

neptune RML2000

Mass Flowmeter for LPG



The Neptune RML2000 mass flowmeter pioneered fully electronic flow measurement and transaction management on the bobtail. With over a decade of success in mobile applications, Red Seal Measurement's Coriolis mass flow technology has proven to be efficient, reliable, and cost-effective.

Compared to traditional mechanical flowmeters, the RML2000 offers better accuracy, higher flow rates, and outstanding stability between yearly calibrations. This performance, combined with electronic temperature compensation, significantly

reduces under-measurement of LP gas.

The meter's unobstructed dual vibrating tube design has no moving parts, increasing service life and lowering maintenance costs.

The Coriolis mass flowmeter provides volumetric flow measurement of LP Gas when interfaced with the same E4000 electronic register used with Neptune Type 4D-MT mechanical flowmeters. The outstanding flexibility of the E4000 register gives the system an upgrade path not obtainable with competitive electronic transaction management systems. The E4000 menu-driven register functions are easy to learn and remember. Interfacing through common handhelds and laptops makes data management fast and easy between truck and office.

The space-efficient RML2000 system can be implemented on both new and existing vehicles. Retrofitting is easy using existing Red Seal Measurement vapor releases and differential valves.

The system provides stable accuracy, reduced maintenance, and fast payback, plus the most cost-effective upgrade path in the market — all backed by unmatched Red Seal Measurement support.


Experience the RML2000 today, and see the bottom-line benefits of total electronic measurement.



Features and Benefits

- Reduced product losses between yearly calibrations
- No moving parts means more reliable operation, less downtime and longer life cycles
- Typical payback less than two years based on accuracy stability alone
- High-frequency electronic temperature compensation sampling for improved accuracy
- Easy to use E4000 electronic register handles multiple products and pricing tables
- Electronic capture of all transaction data eliminates manual errors
- From simple pump and print to full electronic inventory management - all in one model without upgrades
- Communicates easily with office accounting and route management applications
- Red Seal Measurement service and support

Dimensions

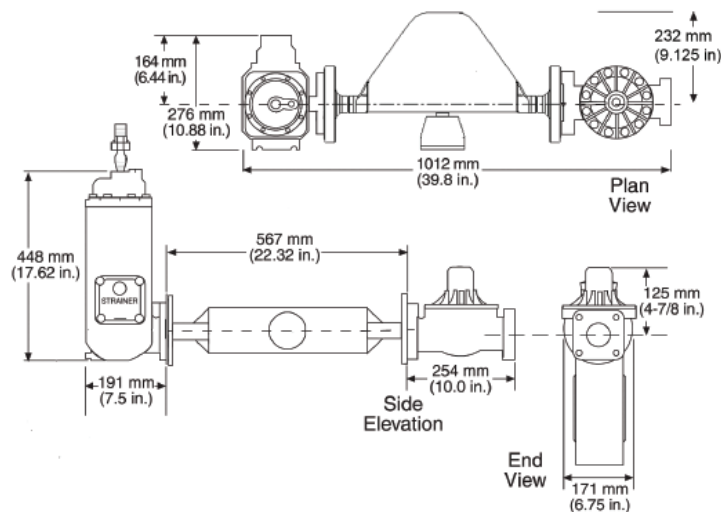

Specifications

PHYSICAL	
Wetted parts	316L stainless steel
Sensor housing	304L stainless steel
Signal transmitter	Aluminum
Weight (transducer only)	13 kg (28 lbs)
Line size	51 mm (2 in.)
PERFORMANCE	
Approved volumetric flow rate	30–310 litres/min (8-82 gpm)
ENVIRONMENTAL	
Temperature range (E4000 Register) ¹	-30–55°C (-22–131°F)
Pressure rating	24 bar (350 psi)
APPROVALS	
Weights and Measures	NTEP Approval to Handbook 44 and NCWM Publications 14
Measurement Canada	MAL-V212, AV-2392C (RML2000 with Mid:Com E:Count)
UL and CSA	Class 1, Div. 2, Groups A, B, C & D (when properly connected to a Red Seal E4000 Electronic Register)

¹ There is no ambient temperature limit for the transducer. (For specifications on the E4000 Electronic Register, see TS-303.)

Accu-Flo 1-800-921-2228
www.accuflo.com

1310 Emerald Road
 Greenwood, SC 29646
 USA
 Phone: 1.800.833.3357
 Fax: 1.864.223.0341



**RED SEAL
 MEASUREMENT**

