

# "Y" – Strainer Specifications




## "Y" Strainer Specifications

Body	ASTM A-A-351 Grade CF8M
Screen	DN8 DN15 - 80
Packing	PTFE
Working Pressure	800PSI
End Connections	Threaded Male

## Materials List

No.	Part Name	Material
1	Body	CF8M
2	Screen	SS316
3	Gasket	PTFE
4	Bonnet	CF8M
5	O-Ring	Viton
6	Plug	CF8M

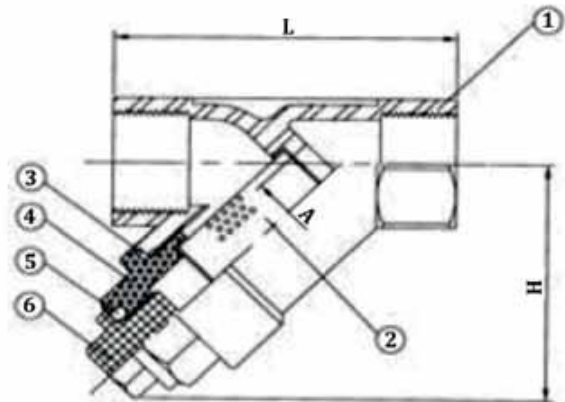

Model	Size	A	L	H	Mesh Size	Size (mm)
D-ST008	DN8	10	65	51	200 Mesh	1/4" (6mm)
D-ST010	DN10	12	65	51	200 Mesh	3/8" (10mm)
D-ST015	DN15	15	65	51	100 Mesh	1/2" (13mm)
D-ST025	DN25	25	90	72	100 Mesh	1" (25mm)
D-ST040	DN40	40	120	87	100 Mesh	1 1/2" (38mm)
D-ST050	DN50	50	140	103	100 Mesh	2" (50mm)
D-ST080	DN80	80	200	143	40 Mesh	3" (80mm)

Authorized Distributor

**Accu-Flo** 1-800-921-2228  
www.accuflo.com

**DIMAK**  
FLOW PRODUCTS