


Light Weight Composite EFM

Model M10

M10 is an electromagnetic flow meter grooved sensor that covers all diameters from DN50 to DN150. When high accuracy, light weight, and compact dimensions are required, the choice of sensors cannot be other than M10.

These performances allow to measure low flow rates precisely and repeatable, even in difficult/problematic applications with solid parts. The M10 sensor series bases its operation on the Faraday Principle, by which a conductor crossing a magnetic field generates an electrical potential perpendicular to the field itself. On the top and on the lower side of the composite flow tube, two coils are installed; the magnetic field generated by the electric current crossing the coils, induces in the electrodes a potential difference proportional to the flow rate.

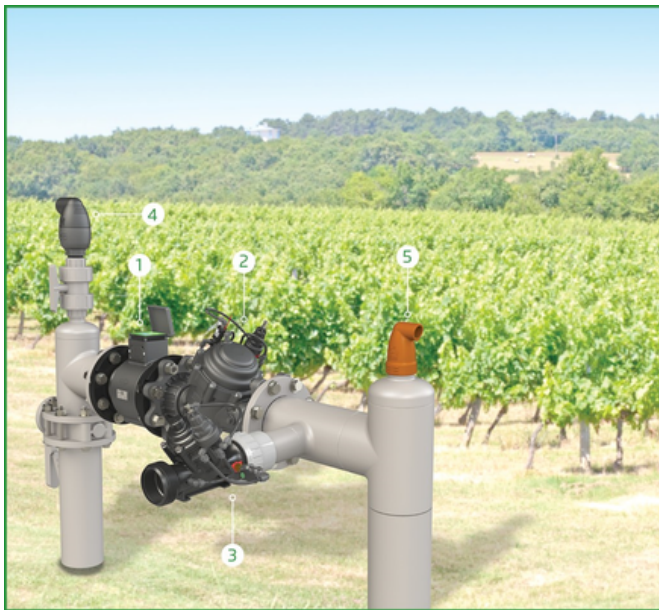


- [1] The Electromagnetic Water Meter Model M10 Install with no upstream and downstream distances
- [2] Pressure Reducing Valve Model IR-120-55-3W-X
- [3] Quick Pressure Relief Valve Model IR-13Q-2W
- [4] Combination Air Valve Model C10
- [5] Kinetic Air Valve Model K10

Features & Benefits

- No moving parts
- Grooved connection - fits all applications
- Long lasting stability and precision, no filter needed, zero maintenance
- Lightweight sturdy structure
- Accurate measure at high flow rate and at low flow rates
- Bi-directional measure
- Internal parts protected by a bi-component resin in order to increase protection from external agents
- Wider range of measurement

Typical Applications

- Irrigation
- District metering of portable water
- Distribution
- Installation of small places without straight distances
- Applications with very low / high flow rate



Body and flanges

The M10 have a flow tube made from composite material. It is equipped with an integrated converter. The degree of protection is IP68. It may be installed between flanges up to PN 16 or ANSI 150. The sensor is grooved and can easily fit to all type of end connections with the preferred adaptor.

Electrodes and grounding

The M10 has three electrodes in AISI 316L and, on request, they can be supplied in other materials. It should be noted that if the sensor is installed in metal pipe line, the liquid grounding does not require the use of grounding rings, because of the presence of the third electrode.

A revolutionary perspective of the flowmetering

The M10 is a battery powered and 12Vdc electromagnetic flow meter for use in agriculture, irrigation, district metering areas (DMA), water abstraction, custody transfer measurement of potable water (MI-001,OIML R49) and many other applications.

Unlike other water meters, the M10 is a maintenance-free meter, offering a much wider range of flow, in a compact version. Thanks to the optimized flow profile, the M10 can be installed virtually anywhere without straight inlet or outlet runs, behind pipe bends, slide valves or

a reduction in the pipe. Its measuring tube is in fact specifically designed to enable a stable measurement even at the lowest flow rates.

Made out of highly reinforced polyamide, the meter is the perfect solution for leak detection, and pressure management systems. The highly robust and at same time lightweight structure, allows IP68 installations with accordance to the manufacturer's guidelines.

Victualic OGS process connections make the flow meter compatible with almost all installations, adapting flanges of all type and standards are also available. Easy and quick to install, users will find this flow meter the perfect solution compared not only to mechanical meters, but to any other non-moving parts flowmeters.

The inbuilt logger functionality provides total flexibility - enabling data to be interrogated in precise detail through the smart and user friendly Mag-Net app, available on Apple and Google play store.

Standards reference


The M10 electromagnetic meters are marked CE and are manufactured according to the following standards:

- 2014/53/EU
- 2014/30/EU - EN 61326-1:2013 (EMC)
- 2014/65/EU
- EN IEC 60529
- OIML R49-1:2013
- European directive 2014/32/EU (MID)


Communication

- Modbus
- Bluetooth

Display

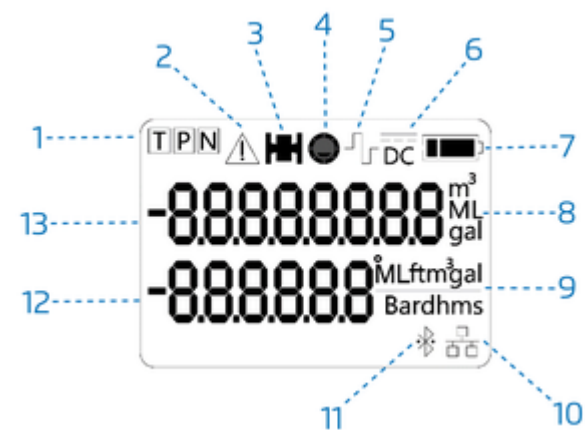


Num	Description
1	totalizer: T partial totalizer: P net totalizer: N
2	Generic error icon
3	Excitation failure icon
4	Empty pipe icon
5	Sleep/awake icon; On - awake; Off - sleep
6	DC mains icon: On-meter powered by DC mains
7	Battery charge icon
8	Volume technical unit
9	Flow rate technical unit
10	RS485 icon: Flashing - communicating Fixed - waiting for communication
11	Bluetooth icon: 1s flashing - configuring Fixed - configured 2s flashing - connected
12	6 digits number
13	8 digits number



Specifications

Structure	Integral Flow meter	
DN Range	DN50/2" ÷ DN150/6"	
Nominal Pressure	16 bar	
Process Connection	Victaulic OGS	
Fluid Conductivity	> 20 µS/cm	
Process Temperature Range	0 ÷ 80 °C (32 ÷ 176 °F)	
Materials in contact with water	Flow tube: Glass fibre reinforced plastic Electrodes: AISI316L	
Power supply	Battery Powered: 3.6 V Lithium Battery Mains Powered: 12Vdc (10.8 ÷ 13.2V), max 100mA	
Consumption	0,25W÷1W (Mains powered)	
Outputs	2 passive outputs (1 programmable), SSR Type (dry contact), galvanically insulated Max. load +/- 35VDC, 100 mA protected against short circuits, minimum pulse duration 5ms. RS485 2 wire /half-duplex	
Communication	Modbus RTU Slave Bluetooth	
Display	LCD Segment display, with dedicated status icons, 8+6 digits	
User Interfaces	Magnetic reed Bluetooth Mobile App Euromag Link Software	
Process memory	100,000 data lines Programmable frequency 1 ÷ 120 minutes (15 minutes factory standard)	
Metrological certificate	OIML R49-1:2013 / MID 2014/32/EU - Class 2 (if requested)	
Temperature range	Ambient: -20 ÷ 60 °C (-4 ÷ +140 °F) Process: 0 ÷ 80 °C (32 ÷ 176 °F) Storage: -40 ÷ 70 °C (-40 ÷ +158 °F)	
Flow velocity range	0.015 m/s up to 10 m/s	
Technical units	m, m3, l, ML, ft3, GAL, AC FT, AC IN	
Totalizers	5 (2 Positive, 2 Negative, 1 Net)	
Alarms and status icons	Status icons displayed and alarms recorded in the data logger	
Self diagnostic	Excitation failure	Bluetooth communication error
	Excessive ambient temperature	Empty pipe
	Wet electronic board	Measurement error
	Low battery level / Mains voltage out of range	Software/memory malfunction
	Pulses overlapping	Mains power interruption
Software for communication and programming	Bluetooth Mobile App - Mag-Net Euromag Link Software (through Bluetooth dongle, or RS485 interface)	
Data Protection	Customizable password protection EEPROM Memory with safe data storage management	



Overall Dimensions



Size	De (mm)	L1 (mm)	L2 (mm)	L3 (mm)	L4 (mm)
2" ; DN50	60.3	230	100	150	200
3" ; DN80	88.6	230	100	150	225
4" ; DN100	114.3	230	100	150	250
6" ; DN150	168.3	300	100	210	300


Calibration and maximum error

Each sensor is calibrated on an hydraulic test rig equipped with a ISO17025 traceable weighing system. The accuracy is equal to 0.2% ± 2mm/s. The repeatability of the measure is about 0.1%. Bi-directional measure. On request the M10 can be supplied certified MID OIML R49 for custody transfer.

Flow Rate



Size Q @ (m³/h)	DN50 2"	DN80 3"	DN100 4"	DN150 6"
Q1 Minimum Flow	0.1	0.25	0.4	1
Q2 Transitional Flow	0.16	0.4	0.64	1.6
Q3 Permanent Flow	40	100	160	400
Q4 Maximum Flow (Short Time)	50	125	200	500

Maximum Permissible Error is within the limits indicated in the following graph:

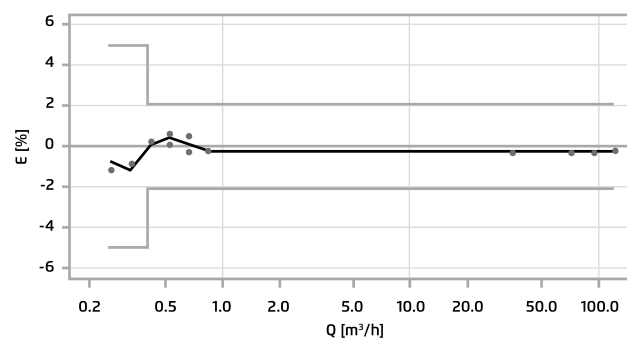

Installation Recommendations

- The arrow on water meter body must be in the same direction with the flow.
- Prior to installation, flush the line to remove debris.
- The water meter must be filled with water to operate.

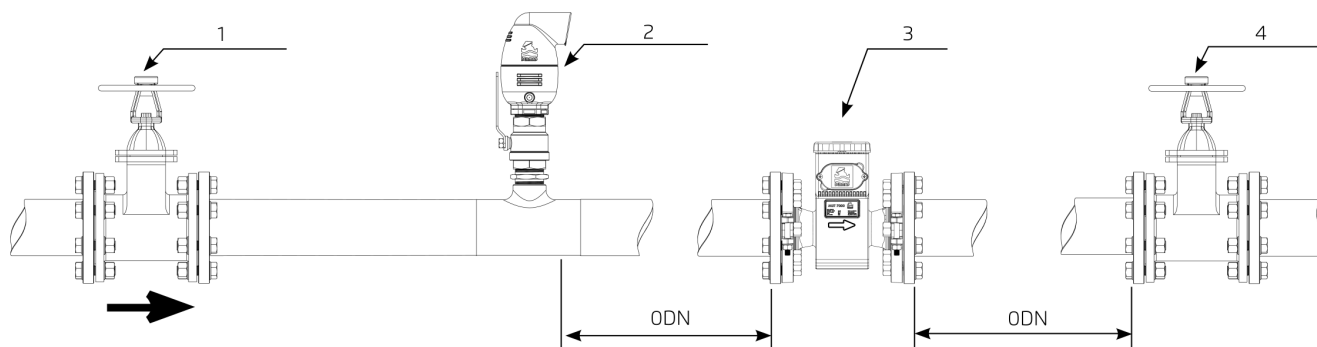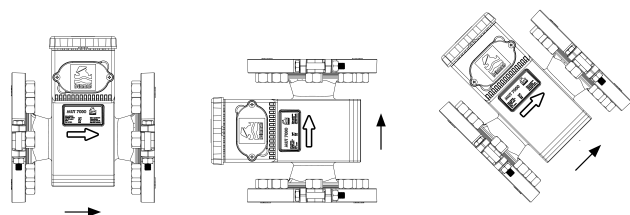

[1] Isolation Valve

[2] Air Valve

[ODN] Unrestricted pipe,
minimum OXDN

[3] M10

[4] Isolation Valve